


# Sonnenschein – A506/3.5 S data sheet



## Terminal: Drawing:

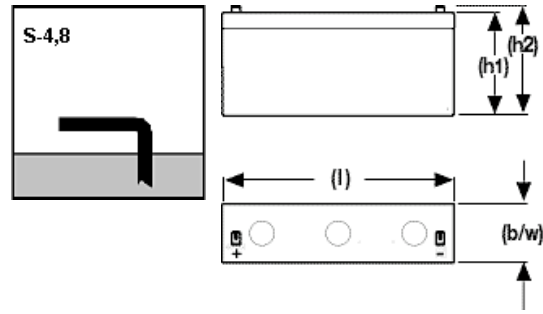

## Specifications:

Part numbers not valid for North America, use type for ordering!

Switch to: Discharge at 25 °C/inches/lb

Exide type designation	Nom. Voltage V	Nom. capacity C <sub>20</sub> 1.75Vpc 20°C Ah	Length (l) max. mm	Width (b/w) max. mm	Height top of cover (h1) max. mm	Height over terminals (h2) max. mm	Weight approx. kg	Internal resistance mOhm	Short circuit current A	Max. Load approx. A	Max. perm current 5 secs. A	Terminal
A506/3.5 S	6	3.50	135	34.8	60.5	64.4	0.70	71	88	60	300	S-4.8

## Constant-current discharge in A @ 20 °C

Part number	Vpc	5 min	10 min	15 min	20 min	30 min	1 h	2 h	3 h	5 h	8 h	10 h
NGA50603D5HS0SA	1.85	9.50	6.70	5.50	4.50	3.40	2.10	1.40	0.95	0.60	0.39	0.32
NGA50603D5HS0SA	1.80	10.6	7.40	6.00	4.90	3.70	2.20	1.40	0.98	0.62	0.40	0.33
NGA50603D5HS0SA	1.75	11.3	7.90	6.20	5.10	3.80	2.30	1.40	0.99	0.62	0.41	0.34
NGA50603D5HS0SA	1.70	12.1	8.30	6.30	5.20	3.90	2.30	1.40	1.00	0.63	0.41	0.34
NGA50603D5HS0SA	1.65	12.7	8.50	6.50	5.30	3.90	2.30	1.40	1.01	0.63	0.41	0.34
NGA50603D5HS0SA	1.60	13.1	8.70	6.50	5.30	3.90	2.30	1.40	1.01	0.63	0.41	0.34

## Constant-power discharge in W/block @ 20 °C

Part number	Vpc	3 min	5 min	10 min	15 min	20 min	30 min	45 min	1 h	1,5 h
NGA50603D5HS0SA	1.85	62.0	51.0	38.0	32.0	26.0	20.0	16.0	13.0	9.00
NGA50603D5HS0SA	1.80	68.0	57.0	42.0	33.0	28.0	21.0	17.0	13.0	10.0
NGA50603D5HS0SA	1.75	73.0	62.0	45.0	35.0	29.0	22.0	18.0	14.0	10.0
NGA50603D5HS0SA	1.70	80.0	66.0	46.0	36.0	30.0	22.0	18.0	14.0	10.0
NGA50603D5HS0SA	1.65	85.0	68.0	47.0	36.0	30.0	23.0	18.0	14.0	10.0
NGA50603D5HS0SA	1.60	89.0	69.0	47.0	37.0	31.0	23.0	18.0	14.0	10.0

© 2000 – 2010 Exide Technologies. All rights reserved. Subject to alterations. [Click here for legal notice.](#)

